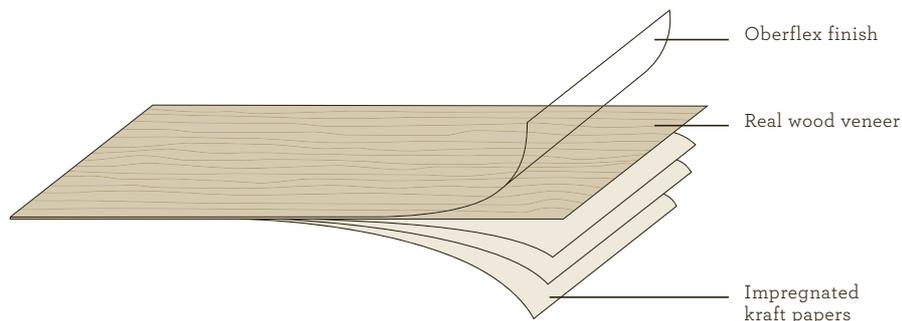

PRESTIGE D'OBERFLEX

The heart of Oberflex know-how: over 40 genuine wood veneer species proposed with Oberflex high resistance finish.
More than 200 references available.



TECHNICAL CHARACTERISTICS

Real wood veneer

Reinforced surface resistance thanks to the Oberflex finish

Finishes

Satin, relief, matte, brushed, pearlescent (according to the references)

Standard dimensions

2520 x 1270 mm - 3050 x 1270 mm

Doors dimensions

2150 x 950 mm - 2150 x 1270 mm - 2520 x 950 mm - 3050 x 950 mm

Fire ratings

M2 - M1 (on request)

Thickness

10/10^e mm in M2 - 13/10^e mm in M1

Maintenance

Use a cloth soaked in soapy water or liquid detergent. After rinsing, wipe with a soft and clean cloth, or even better, with a chamois leather.

Bending

Cold bending up to a 200 mm radius either parallel or perpendicular to the wood grain in 1 mm thickness.

The Prestige d'Oberflex references are available in cross-grain panels (cross grain panels have wood grains that run parallel to the width of the panels). Consult us.

THE RESISTANCE OF THE OBERFLEX FINISH



Abrasion resistance



Impact resistance



Scratch resistance



Light resistance



No attack by common-type products



Cigarette burning resistance



Can be cleaned with soapy water



Fire resistance