


---

## TEXTURED WOOD

Gouged, seawood and hammered veneers. 9 textures proposed in nuances of white, black and grey.

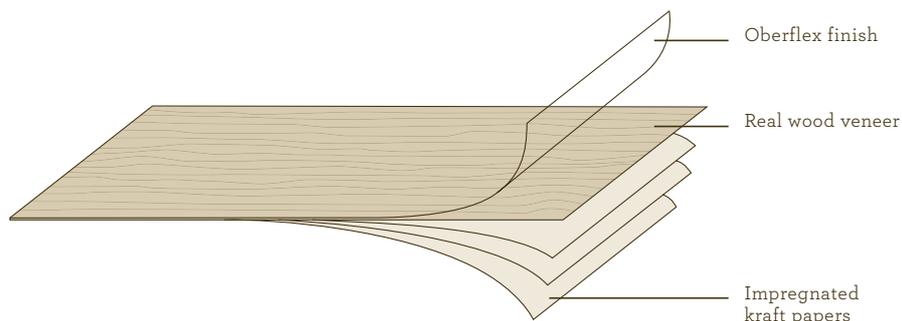

---

## TECHNICAL CHARACTERISTICS

Real textured wood veneer

Reinforced surface resistance thanks to the Oberflex finish

### Finishes

Satin, matte, pearlescent (according to the references)

### Thickness

- Sablés Wood : 10/10° mm in M2 - 13/10° mm in M1 (except Black and White Oak : 13/10° mm in M2 and M1)
- Other textures : 13/10° mm in M2 and M1

### Dimensions

Standard dimensions : 2520 x 1270 mm - 3050 x 1270 mm (except Black and White Oak references : 2520 x 1230 mm - 3020 x 1230 mm)

Doors dimensions : 2150 x 950 mm - 2150 x 1270 mm - 2520 x 950 mm - 3050 x 950 mm (except Black and White Oak references : 2150 x 950 mm - 2150 x 1230 mm - 2520 x 950 mm - 3020 x 950 mm)

### Fire rating

M2 - M1 (on request)

**Maintenance :** Use a cloth soaked in soapy water or liquid detergent. After rinsing, wipe with a soft and clean cloth, or even better, with a chamois leather.

**Bending :** Cold bending up to a 400 mm radius either parallel or perpendicular to the wood grain (White and Black Oak references : 500 mm)

The Sablés and Cleft Wood references are available in cross-grain panels (cross grain panels have wood grains and texture that run parallel to the width of the panels). Consult us.

---

## THE RESISTANCE OF THE OBERFLEX FINISH



Abrasion resistance



Impact resistance



Scratch resistance



Light resistance



No attack by common-type products



Cigarette burning resistance



Can be cleaned with soapy water



Fire resistance